



机构性能 Mechanisms

机构特性 Mechanisms specification				 / 				kW
起升 Hoisting		180LVF133	m/min t	0-6 40-80	0-12 20-40	0-24 10-20	0-48 0-10	
变幅 Trolleying		30DVF33	m/min	0 - 20				
回转 Slewing		RVF	r/min	0 - 0,3				4 × 18,5
顶升 Jacking			m/min	0 - 0,3				
 电源 Power Supply					380V 50Hz			
 供电容量 Necessary Electric Power					300kVA			

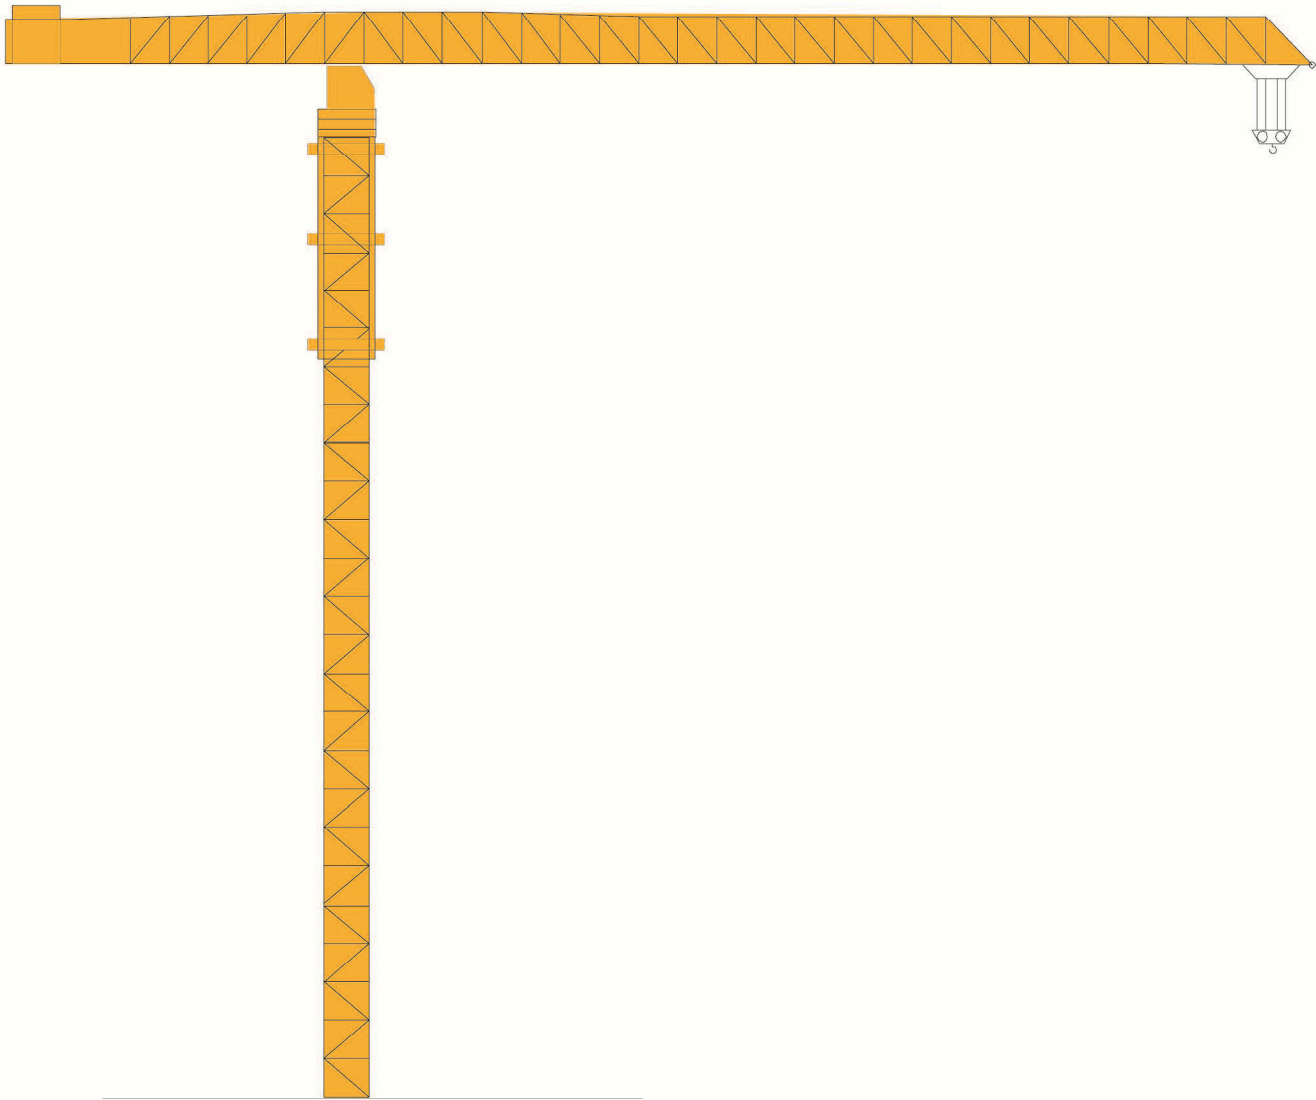


外形尺寸 Dimensions

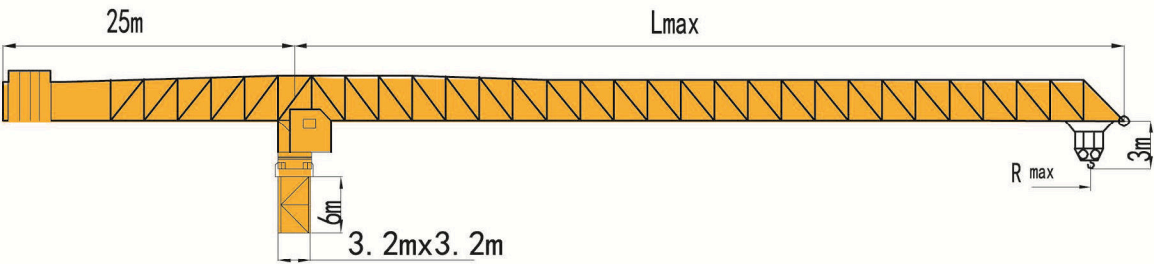

Lmax	51,5m	61,5m	71,5m
Rmax	50,0m	60,0m	70,0m


附着 Anchorages

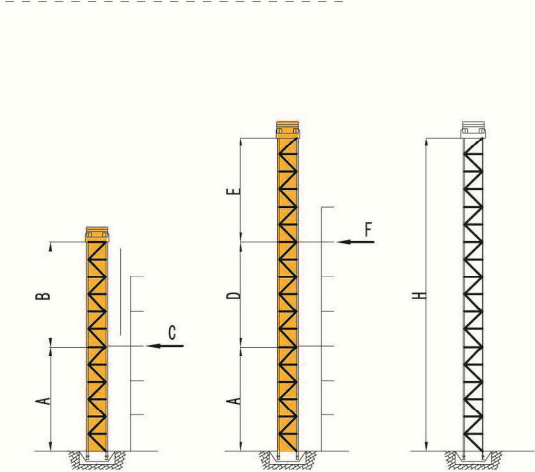

塔机工作状态风速 20m/s
In service wind speed up to 20m/s
非工作状态风速 42m/s
Out of service wind speed up to 42m/s

一道附着 Only one tie			
A	附着最低高度 Min height base to first tie	24	(m)
B	最大自由高度 Max height above first tie	54	(m)
C	最大附着反力 Max horizontal tie load	110	(t)
多道附着 More than one tie			
D	附着最小间距 Min distance between two ties	24	(m)
E	最大自由高度 Max height above top tie	54	(m)
F	最大附着反力 Max horizontal tie load	110	(t)
G	最大独立高度 Max lift height without tie	60	(m)




内爬 Climbing Crane

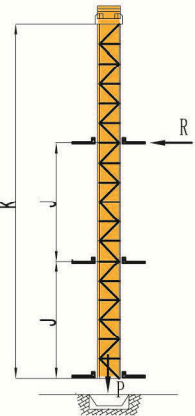

塔机工作状态风速 20m/s
In service wind speed up to 20m/s
非工作状态风速 42m/s
Out of service wind speed up to 42m/s

J	支撑最小间距 Min distance between collars	18	(m)
K	塔身长度 Mast length	48	(m)
R	最大支撑反力 Max. horizontal load	100	(t)
P	最大垂直力 Total vertical load	510	(t)

载荷特性 Load Diagrams

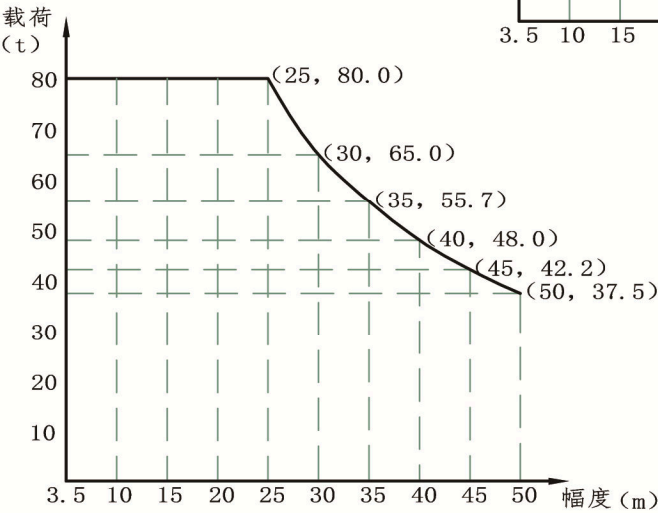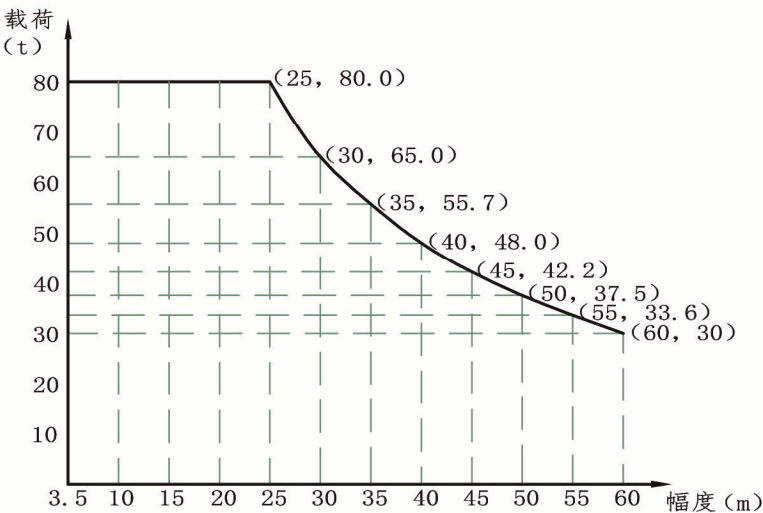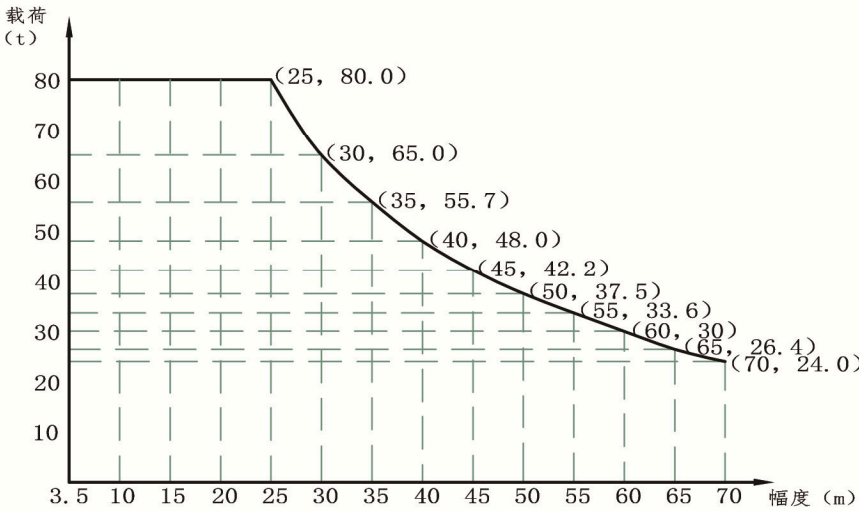

注：此曲线为起升高度100m时的净吊重，超过100m时起吊重量应扣除相应钢丝绳的重量。
Remark: This curve shows the net load at the hoist height of 100m, load weight of the wire rope should be deducted at the height of over 100m.